SPECIAL HANDLING

COPY 3 OF 7 COPIES

PROGRAM REVIEW

NRO REVIEW COMPLETED

SOARD AN APQ 93 RADAR
Contract

NRO

STAT

30 December 1964

WESTINGHOUSE ELECTRIC CORPORATION

AEROSPACE DIVISION

Box 746, Baltimore, Md. 21203

# SPECIAL HANDLING

# PERFORMANCE

ORIGINAL OBJECTIVES	PRESENT PERFORMANCE	PREDICTED PERFORMANCE	
3 DEVELOPMENTAL MODELS			
3.2 M, 90,000 FT	I.5 M, 45000 FT	3.2 M, 90,000 FT	
27 MILE STAND-OFF	13 MILE STAND-OFF	27 MILE STAND-OFF	
20 MILE STRIP-9 INCH FILM	IO MILE STRIP-9 INCH FILM	20 MILE STRIP-9 INCH FILM	
600 LBS AIRBORNE RADAR	932 LBS		
GROUND-BASED OPTICAL CORRELATOR			
RESOLUTION: 10 FT X 10 FT	RESOLUTION: 8 FT X 23 FT (Az X RANGE)	RESOLUTION : II FT X 27 FT	
SIGNAL / NOISE > O db	SIGNAL / NOISE II.4 db	SIGNAL / NOISE -1.5db	
	RESOLUTION WITH DETAIL CORRELATOR 4 FT X 23 FT	DETAIL CORRELATOR 4 FT X 27 FT	
		WITH CHIRP MODIFICATION; IO MI. STRIP	
		RESOLUTION : II X II FT	
•		DETAIL CORRELATOR 4 FT X II FT	

Replace with 4 missing illustrations


## **TARGET RESOLUTION**


# SPECIAL HANDLING

ALT. 20,000FT. SPEED 550 KPH.

# DETAIL CORRELATOR IMAGE INDICATING

AZIMUTH RESOLUTION OF 4 FT.

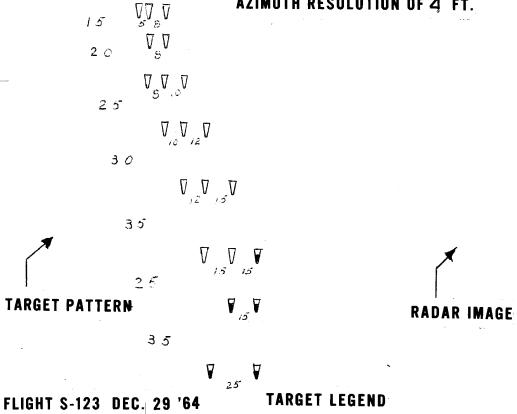

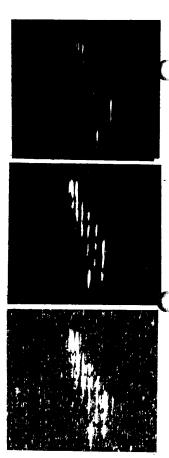

SPECIAL HANDLING

▼ = 365 FT.2

 $\nabla \equiv 75.3 \text{ FT.}^2$ 

NRO

STAT

# COST REVIEW

## SOARD AN/APQ-93 RADAR

ITEM	DESCRIPITION	STATUS	RECOMMENDATION	BUDGET COST ESTIMATE
1	DEVELOPMENT PROGRAM 3 RADAR SETS-I CORRELATOR	COMPLETE		
2	MODIFICATION PROGRAM (SIG/NOISE AND RESOLUTION IMPROVEMENT) (ANTENNA REPAIR)	IN PROGRESS	COMPLETE MODS	
3	SPARES PROGRAMS	CURRENT	MAINTAIN	
4	GROUND SUPPORT EQUIPMENT	COMPLETE		
5	FIOI FLIGHT TEST	AUTHORIZED TO APR. 15,1965		
6	PHASE II FLIGHT TEST	AUTHORIZED TO FEB 15,1965	4 PART FLIGHT	
7	CORRELATOR PROGRAM	ITEK CONTRACT TO DEC 31,64	EVALUATION PROGRAM TO	
8	DETAIL CORRELATOR	PROPOSAL SUBMITTED (J-0194-57; SEPT 30,1964)	JUNE 30, 1965	
9	RADAR INTERPRETATION	IN PROGRESS (J-0194-58 PARTS 1,2 AND 5)		
10	CORRELATOR MECHANICAL REVIEW	PROPOSAL	CONDUCT LIMITED REVIEW PROGRAM	
11	2ND A/C INSTALLATION	PROPOSAL		
12	ADVANCED TECHNIQUES	PROPOSAL	MODIFY ONE RADAR FOR CHIRP (PROVE RE- SOLUTION WITH DETAIL CORRELATOR	

## SPECIAL HANDLING

#### CONTINUATION OF PROGRAM EFFORT

SOARD AN APQ-93 RADAR

- Item 2 MODIFICATION PROGRAM to improve resolution and signal/noise ratio

  In Progress
  - a Reduced Transmitter Pulse Width
    - 1) 30 Nano-second to 20 Nano-second
  - b. Addition of Low Noise Pre-Amplifier
    - 1) Replacing TWT amplifier with Parametric amplifier. System Signal/Noise improvement of 3.9 db.
- Item 3 SPARES PROGRAMS -- to provide spares for Flight Test Evaluation programs.

  These programs are current and are being maintained.
- Item 4 GROUND SUPPORT EQUIPMENT

Complete

- Item 5 F-101 FLIGHT TEST -- to accomplish, most efficiently, preliminary check of operation.
  - a. Optimization, at minimum cost, of Radar and correlator before installation in final vehicle
  - b. Check of Ground Support Equipment and establishment of ground check-out procedures.
  - c Provide data to check Radar mods.
  - d Provide majority of data for Radar Interpretation Program over wide range of terrain.
- Item 6 PHASE II FLIGHT TEST -- to prove operation of Radar in design environment.
  - a. Accomplish integration of Radar with:
    - 1) Aircraft
    - 2) INS Nav. Sys
  - b Provide data for Radar Interpretation Program under full design conditions.
- Item 7 CORRELATOR PROGRAM to maintain and operate Optical Correlator.
  - a. Provide correlation of data film from the two Flight Test programs

- Item 8 DETAIL CORRELATOR -- to provide optimum correlation of limited target area; 1/2 1 mi.
  - a For detail analysis of aircraft behavior.
  - b. Provide verification of proper radar adjustment and performance
  - c Verify performance of Ground Support Equipment and test patterns.
  - d For Radar Interpretation program -- as a tool for visually scrutinizing detail target complexes while varying controls; then photographing optimum result.
- Item 9 RADAR INTERPRETATION PROGRAM to derive maximum intelligence value from radar images.
  - a. To serve as adjunct to optical camera surveillance
    - 1) Fill-in for cloud gaps in otherwise good optical photos
    - 2) During night, rain, snow, fog, haze
    - 3) Provide "stand-off" advantage
    - 4) Different sensor response for additional clues.
  - b Improve RI capability.
    - 1) Seek out targets of special military significance.
    - 2) Simultaneous recon camera photos for comparison.
    - 3) Attempt differentiation of materials; natural and structural

# SPECIAL HANDLING

- Item 10 CORRELATOR MECHANICAL REVIEW to provide greater consistancy of operation at high levels of performance which have been achieved
  - a. Investigate "Noise" light level in correlator which appears to be limiting min. signal detection.
  - b. Check back-lash and re-set-ability of all controls.
  - c Check Tracking of input and output films.
  - d Investigate sensitivity to vibration, power transients.
- Item 11 2nd A C INSTALLATION to provide installation trusses, brackets and waveguide for another vehicle.
  - Better opportunity for scheduling flights in final vehicle with 2 aircraft modified
  - b. Opportunity for 2 simultaneous installations permitting dual pre-flight check-out.
- Item 12 ADVANCED TECHNIQUES PROGRAM -- to incorporate chirp operation of transmitter
  - a. Improve range resolution approx. three-fold giving "square" resolution element of about 11 ft. X 11 ft.
  - b Average power for sets #2 and #3 can then be increased ten-fold to provide approx. +8 db Signal Noise ratio for design altitude.

